

FILTER MAX SERIES



 **EMAUX**
Pool and Spa Systems.




FILTRATION

FEATURES

- Compact and heavy duty
- Non-poisonous
- Designed for most domestic swimming pools or spa pools
- Clamp lock is designed to allow 360 degree rotation to simplify installation
- Easy-to use water drain plug and multi-port valve lets you select any of the valves / filter operation with a simple lever-action

FILTER MAX SERIES TOP MOUNT FILTER (MFV17-MFV35) **NEW**

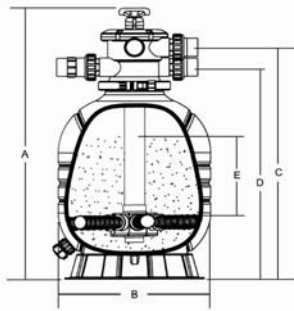


FUNCTIONS: Refer to 6-Way Multi-Port Valve

Maximum Working Pressure	250kPa/36psi/2.5bar
Factory Testing Pressure	400kPa/58psi/4.0bar
Size of Silica Sand	0.5-0.8mm
Maximum Filtration Velocity	50m ³ /h/m ²
Maximum Water Temperature	50°C (122°F)

TECHNICAL CHARACTERISTICS


Code	Model No	Filter Area(m ²)	Valve Connections	Max Flow Rate	Sand(kg)
88012526	MFV17	0.14	1 1/2 inch 50mm	125gpm 7.5m ³ /h	40
88012527	MFV20	0.20	1 1/2 inch 50mm	175gpm 10.5m ³ /h	70
88012528	MFV24	0.28	1 1/2 inch 50mm	238gpm 14.3m ³ /h	125
88012529	MFV27A	0.36	1 1/2 inch 50mm	325gpm 19.5m ³ /h	185
88012530	MFV27	0.36	2 inch 63mm	338gpm 20.3m ³ /h	185
88012531	MFV31A	0.47	1 1/2 inch 50mm	373gpm 22.4m ³ /h	320
88012532	MFV31	0.47	2 inch 63mm	412gpm 24.7m ³ /h	320
88012533	MFV35	0.61	2 inch 63mm	515gpm 30.9m ³ /h	430

A mm	B mm	C mm	D mm	E mm
816	425	695	625	195
889	500	772	712	225
980	600	860	800	280
1081	675	963	903	300
1133	675	978	910	300
1128	775	1008	948	370
1178	775	1021	955	370
1290	875	1139	1073	440

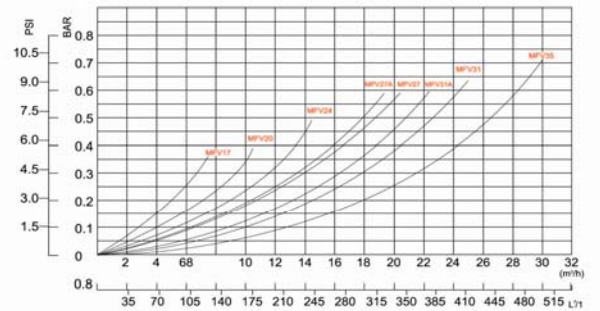

Maximum Water Temperature 50°C (122°F)

FILTER MAX SERIES SIDE MOUNT FILTER (MFS17-MFS35) **NEW**

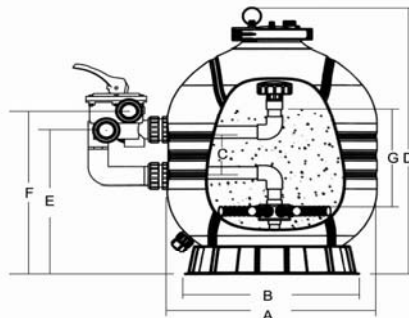


TECHNICAL CHARACTERISTICS

Code	Model No	Filter Area(m ²)	Valve Connections	Max Flow Rate	Sand(kg)
88012526	MFS17	0.14	1 1/2 inch 50mm	125gpm 7.5m ³ /h	40
88012527	MFS20	0.20	1 1/2 inch 50mm	175gpm 10.5m ³ /h	70
88012528	MFS24	0.28	1 1/2 inch 50mm	238gpm 14.3m ³ /h	125
88012529	MFS27A	0.36	1 1/2 inch 50mm	325gpm 19.5m ³ /h	185
88012530	MFS27	0.36	2 inch 63mm	338gpm 20.3m ³ /h	185
88012531	MFS31A	0.47	1 1/2 inch 50mm	373gpm 22.4m ³ /h	320
88012532	MFS31	0.47	2 inch 63mm	412gpm 24.7m ³ /h	320
88012533	MFS35	0.61	2 inch 63mm	515gpm 30.9m ³ /h	430

A mm	B mm	C mm	D mm	E mm	F mm
670	425	125	195	354.5	417.5
760	500	125	225	396.3	549.3
825	600	125	280	423.5	452.5
946	675	125	300	480.0	543.0
946	675	220	300	527.5	590.5
968	775	125	370	505.5	568.5
968	775	220	370	553.0	638.0
1086	875	220	440	609.0	695.0

filter operation with a simple lever-action

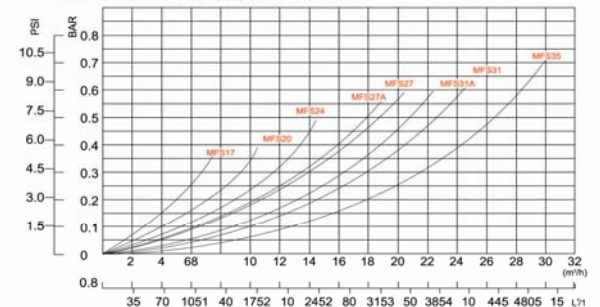

Your Dealer:

* WE RESERVE THE RIGHT TO CHANGE ALL OR PART THE FEATURES OF THE ARTICALS OR CONTENTS OF THIS DOCUMENT WITHOUT PRIOR NOTICE.