





Highlight Features:


- Asynchronous, Two poles
- Class insulation: 155
- IPX5 Waterproof standard
- Built-in thermal protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/110V
- Special design union compatible for both Imperial and Metric measurement standard



“AQUA-MINI” PUMP SERIES

“AQUA-MINI” series pump is specially designed for above-ground swimming pool. Attached with a pre-filter with transparent lid for easy maintenance. To lower the running cost, it operates at a low energy consumption and noise level. Standard connection of 1.5” with additional 1 inch adaptor for flexible vacuum hose connection.

TECHNICAL INFORMATION

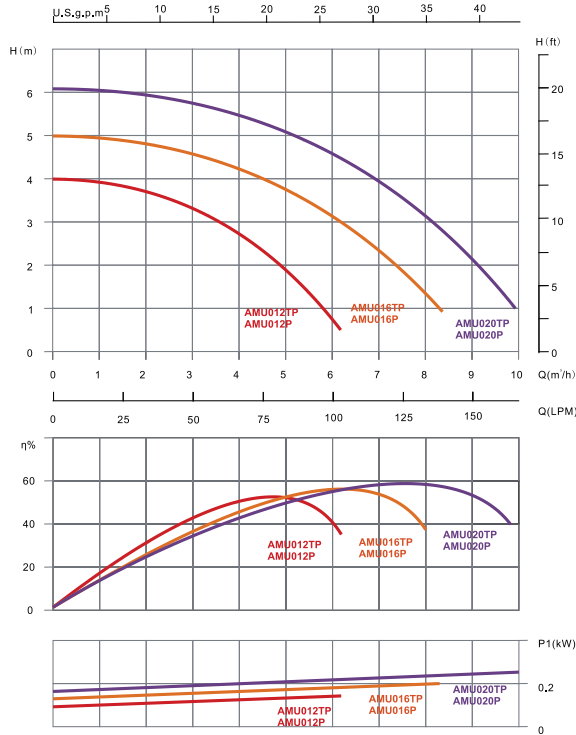

Remarks: Flow curve information based on 220V/50Hz motor.

PRODUCT INFORMATION & DIMENSION

Code 220V/50Hz	Code 110V/60Hz	Code 220V/60Hz	Model No	Description	Input power	Horsepower
88028419	88028519	88028319	AMU012TP	0,12HP AQUA-MINI PUMP(with timer & pre-filter)	0,15kW	0,12hp
88027819	88027919	88027719	AMU012P	0,12HP AQUA-MINI PUMP(with pre-filter)	0,15kW	0,12hp
88028420	88028520	88028320	AMU016TP	0,16HP AQUA-MINI PUMP(with timer & pre-filter)	0,20kW	0,16hp
88027820	88027920	88027720	AMU016P	0,16HP AQUA-MINI PUMP(with pre-filter)	0,20kW	0,16hp
88028401	88028501	88028301	AMU020TP	0,20HP AQUA-MINI PUMP(with timer & pre-filter)	0,25kW	0,20hp
88027801	88027901	88027701	AMU020P	0,20HP AQUA-MINI PUMP(with pre-filter)	0,25kW	0,20hp

Model No	A mm	B mm	C mm	D mm	Filter & Pump In/Out Connections	Adaptor	Weight(kg)
AMU012TP	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	3,8
AMU012P	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	3,8
AMU016TP	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	4,2
AMU016P	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	4,2
AMU020TP	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	4,2
AMU020P	450,5	159,6	265	229	1,5 inch 50mm	1 inch 32 & 38mm	4,2